

# A geometrically exact membrane model for isotropic foils and fabrics

Kerstin Weinberg\*<sup>1</sup> and Patrizio Neff<sup>2</sup>

<sup>1</sup> Institut für Mechanik, MS2, Technische Universität Berlin, Einsteinufer 5, 10587 Berlin, Germany

<sup>2</sup> Fachbereich Mathematik, AG6, Technische Universität Darmstadt, Schlossgartenstrasse 7, 64289 Darmstadt, Germany

© 2007 WILEY-VCH Verlag GmbH & Co. KGaA, Weinheim

## 1 The finite-strain-viscoelastic membrane model

The spatial deformation of a thin-walled structure  $\phi_s : \omega \times (-\frac{h}{2}, \frac{h}{2}) \rightarrow \mathbb{R}^3$  is decomposed into the motion of the (initially plane) midsurface  $m : \omega \subset \mathbb{R}^2 \mapsto \mathbb{R}^3$  and of the director (initially) orthogonal to the midsurface,

$$\phi_s(x, y, z) = m(x, y) + z \varrho_m(x, y) R(x, y) \cdot e_3, \tag{1}$$

where  $R = \text{polar}(F) \in \text{SO}(3)$  is the orthogonal part of the deformation gradient  $F$  with out-of plane component  $R(x, y) \cdot e_3$ . The variable  $\varrho_m \in \mathbb{R}$  accounts for a varying thickness, see [1, 2] for details.

**Basic idea:** introduce an *additional* field of independently evolving viscoelastic rotations  $\bar{R} \in \text{SO}(3)$ . These rotations  $\bar{R}$  are thought of as being physical meaningful but not exact continuum rotations  $R$ . With  $R_3 \equiv \bar{R}(x, y) \cdot e_3$  denoting the corresponding out-of plane component the dimensional reduction of a three-dimensional continuum solid to a geometrically exact membrane model results in a deformation gradient of the form

$$F = (\nabla m |_{\varrho_m} \bar{R}_3), \tag{2}$$

where  $\nabla m \in \mathbb{M}^{3 \times 2}$  is the deformation gradient of the midsurface with  $m_x = (m_{1,x}, m_{2,x}, m_{3,x})^T$ ,  $m_y = (m_{1,y}, m_{2,y}, m_{3,y})^T$ .

**The problem:** find the deformation of the midsurface  $m : [0, T] \times \omega \mapsto \mathbb{R}^3$  and the independent local viscoelastic rotation  $\bar{R} : [0, T] \times \omega \mapsto \text{SO}(3)$  such that

$$\int_{\omega} h W(F, \bar{R}) \, d\omega - \int_{\omega} \langle f_b, m \rangle \, d\omega - \int_{\gamma_s} \langle f_s, m \rangle \, ds \mapsto \min, \tag{3}$$

w.r.t.  $m$  at fixed rotation  $\bar{R}$ . The strain energy density  $W(F, \bar{R})$  in (3) is of the form

$$W(F, \bar{R}) = \frac{\mu}{4} \|F^T \bar{R} + \bar{R}^T F - 2I\|^2 + \frac{\lambda}{8} \text{tr} \left( F^T \bar{R} + \bar{R}^T F - 2I \right)^2. \tag{4}$$

Moreover, let  $W^{\text{ext}}(m)$  be the linear work of applied external forces with  $f_b$  being the resultant body forces and  $f_s$  the resultant surface traction and let  $g_d : \omega \mapsto \mathbb{R}^3$  denote the prescribed Dirichlet boundary conditions for the membrane,

$$W^{\text{ext}}(m) = \int_{\omega} \langle f_b, m \rangle \, d\omega - \int_{\gamma_s} \langle f_s, m \rangle \, ds, \quad m|_{\gamma_0}(t, x, y) = g_d(t, x, y) \quad x, y \in \gamma_0 \subset \partial\omega. \tag{5}$$

The field of local viscoelastic rotation follows an **evolution equation**

$$\frac{d}{dt} \bar{R}(t) = \nu^+ \cdot \text{skew}(B) \cdot \bar{R}(t) \quad \text{with} \quad \nu^+ := \frac{1}{\eta} \nu^+(F, \bar{R}), \quad \text{and} \quad B = F \bar{R}^T. \tag{6}$$

Here  $\nu^+ \in \mathbb{R}^+$  represents a scalar valued function introducing an *artificial viscosity* and  $\eta$  plays the role of an *artificial relaxation time* (with units [sec]). The evolution equation (6) and parameter  $\nu^+$  are introduced into the model to preserve ellipticity of the force balance. Physically, one may imagine the viscoelastic rotation  $\bar{R}$  as *shadowing* the exact continuum rotation in a viscous sense.

\* Corresponding author: e-mail: kerstin.weinberg@tu-berlin.de, Phone: +49 30 314 24214, Fax: +49 30 314 24499

## 2 Discretization of the model

We consider a fully implicit time discretized version of model (3). Let  $(m^{n-1}, \bar{R}^{n-1})$  be the given solution for the deformation of the midsurface and the rotations at time  $t_{n-1}$ . Now, compute the new solution  $(m^n, \bar{R}^n) \in \mathcal{V}$  at time  $t_n$  such that

$$\int_{\omega} h W(F^n, \bar{R}^n) d\omega - W^{\text{ext},n}(m^n) \mapsto \min ., \quad (7)$$

w.r.t.  $m^n$  at fixed  $\bar{R}^n$ . The current deformation gradient  $F^n = F(t_n)$  is

$$F^n = (\nabla m^n |_{\varrho_m^n} \bar{R}_3^n), \quad (8)$$

and the current boundary conditions are

$$m^n|_{\gamma_0}(t_n, x, y) = g_d(t_n, x, y), \quad x, y \in \gamma_0 \subset \partial\omega. \quad (9)$$

The **evolution equation** for the rotations is mapped by a **local exponential update**. This implies that  $\bar{R}^n = \bar{R}^{n-1}(\nabla m^n)$  solves the following highly nonlinear problem

$$\bar{R}^n = \exp\left(\Delta t \nu_n^+ \text{skew}\left(F^n \bar{R}^{n-1,T}\right)\right) \cdot \bar{R}^{n-1} \quad \text{with } \nu_n^+ = \frac{1}{\eta} \left(1 + \|\text{skew } F^n \bar{R}^{n-1,T}\|\right)^2. \quad (10)$$

By the properties of logarithmic and exponential mapping it can be shown that (10) converges to (6) for the limit  $\Delta t \rightarrow 0$ , see [1].

The **finite element discretization** of problem (7) considers discrete subspaces  $\mathcal{V}_h$  of the continuous solution spaces  $\mathcal{V}$  for the membrane's deformation. We employ

$$\mathcal{V}_h = \mathcal{P}^o_1(\mathcal{T})^3 \times \mathcal{P}_0(\mathcal{T})^{3 \times 3}, \quad (11)$$


where  $\mathcal{P}_k(\mathcal{T})$  denotes the linear space of  $\mathcal{T}$ -piecewise polynomials of degree  $\leq k$ , and,  $\mathcal{P}^o_k(\mathcal{T})$  are the continuous discrete functions in  $\mathcal{P}_k(\mathcal{T})$  with homogeneous boundary values. Thus, the **discrete problem** reads: find the deformation of the midsurface of the membrane and the independent local viscoelastic rotation  $(m_h, \bar{R}_h) : [0, T] \times \mathcal{V}_h$  such that,

$$\int_{\omega} h W(F(m_h), \bar{R}_h) d\omega - W^{\text{ext}}(m_h, \bar{R}_{h3}) \mapsto \min ., \quad (12)$$

w.r.t.  $m_h$  at fixed rotation  $\bar{R}_h$  such that  $R_h$  satisfies (10).

## 3 Example: wrinkling of a thin foil

We apply our model to the problem of a  $2 \times 2$  m elastic foil under pressure load. The foil is 1 mm thick, lies on a square obstacle (like a cloth on a table) and only the unsupported part of it can deform. A pressure of  $p_0 = 0.75$  MPa acts from above.

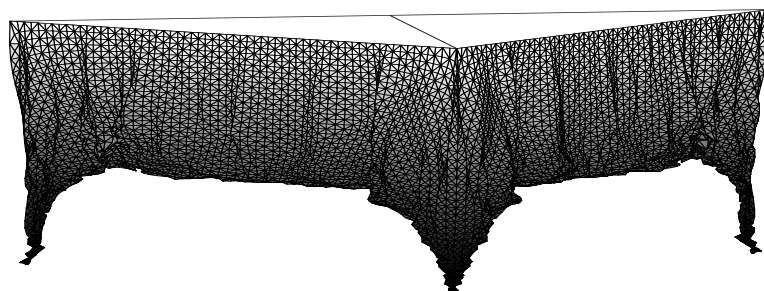

**Fig. 1** Wrinkling of a soft foil (relaxed state)

## References

- [1] K. Weinberg and P. Neff: *A geometrically exact thin membrane model - investigation of large deformations and wrinkling*, to appear in: *Int. J. Numerical Methods in Engineering*, published online in Wiley InterScience (www.interscience.wiley.com). DOI: 10.1002/nme.2189
- [2] P. Neff: *A geometrically exact viscoplastic membrane-shell with viscoelastic transverse shear resistance avoiding degeneracy in the thin-shell limit. Part I: The viscoelastic membrane-plate.*, *Zeitschrift Angewandte Mathematik Physik*, **56** (2005), 148–182.